DRL800U

DDR2-800, PC2-6400, Unbuffered, ECC, 1.8V, 240-pin DIMMs

Products in Family

DRL800U/4GB (2 x 2GB 2Rx8 DIMMs)
DRL800U/8GB (2 x 4GB 2Rx8 DIMMs)

Features	Description
240-pin JEDEC-compliant DIMMs 133.35 mm wide by 30 mm high (1.181” x 5.25”) Data Transfer Rate: 6.4 Gigabytes/sec Operating Voltage: 1.8 V ±0.1 Fully RoHS Compliant	Each DRL800U upgrade consists of two DDR2-800 Unbuffered ECC DIMMs that conform to JEDEC’s DDR2, PC2-6400 standard. One 2K-bit EEPROM is used for Serial Presence Detect.

Dataram Product	Dell Product	Supported in these Dell systems:
DRL800U/4GB DRL800U/8GB	A2018598	Dell PowerEdge R200, T100, T105 Servers and Precision T3400 Workstations

Front view

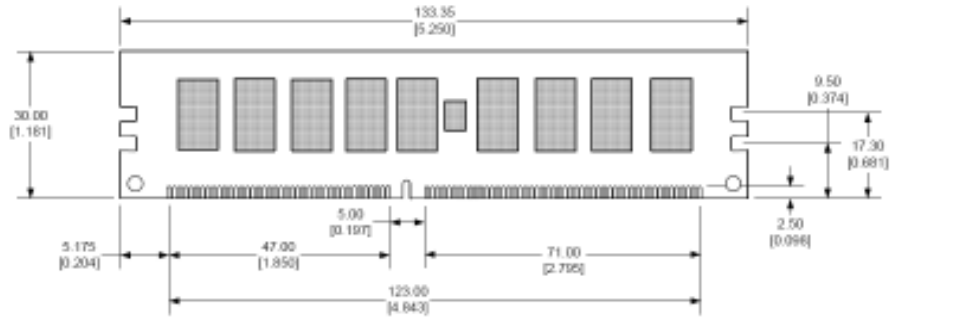

Back view

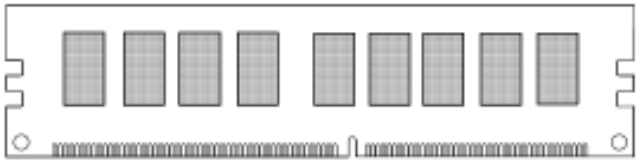

Side view



Notes

Tolerances on all dimensions except where otherwise indicated are ±.13 (.005).

All dimensions are expressed in millimeters [inches]

Copyright © 2011 Dataram Corporation | U.S.A. Headquarters +1 609-799-0071 | Offices in Europe and Asia | www.dataram.com

The information contained in this document has been carefully checked and is believed to be reliable and accurate. However, Dataram assumes no responsibility for errors.